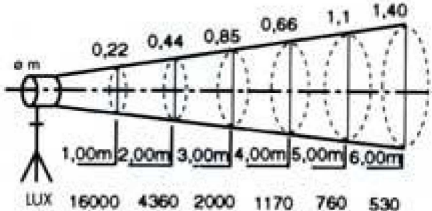
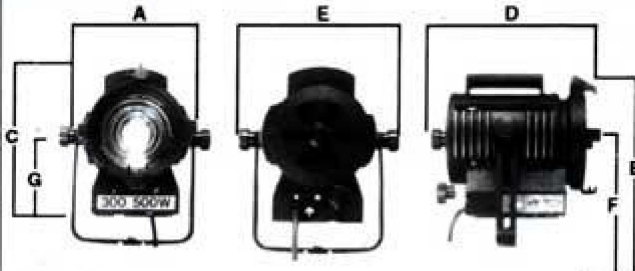
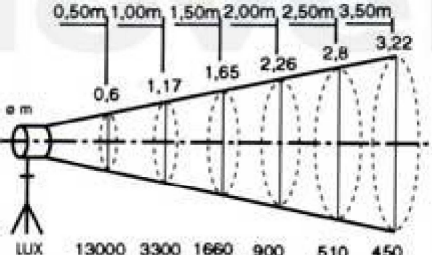


		PHOTOMETRIC DATA	TECHNICAL DATA								
SPOT	BULB 500 W	 <p>Diagram showing beam spread and lux values for SPOT BULB 500 W. Distances (m): 1,00m, 2,00m, 3,00m, 4,00m, 5,00m, 6,00m. Beam diameter (m): 0,22, 0,44, 0,66, 1,1, 1,40. Lux values: 16000, 4360, 2000, 1170, 760, 530.</p>									
	BULB 500 W	 <p>Diagram showing beam spread and lux values for FLOOD BULB 500 W. Distances (m): 0,50m, 1,00m, 1,50m, 2,00m, 2,50m, 3,50m. Beam diameter (m): 0,6, 1,17, 1,65, 2,26, 2,8, 3,22. Lux values: 13000, 3300, 1660, 900, 510, 450.</p>	<h3>HEAD</h3> <table><tr><td>A HEAD WIDTH (mm).....120</td><td>E WIDTH (mm)170</td></tr><tr><td>B TOTAL HEIGHT (mm).....240</td><td>F YOKE HEIGHT (mm).....165</td></tr><tr><td>C HEAD HEIGHT (mm)160</td><td>G HEAD BASE TO YOKE (mm)85</td></tr><tr><td>D HEAD DEPTH (mm)180</td><td>WEIGHT(kg)1,5</td></tr></table>		A HEAD WIDTH (mm).....120	E WIDTH (mm)170	B TOTAL HEIGHT (mm).....240	F YOKE HEIGHT (mm).....165	C HEAD HEIGHT (mm)160	G HEAD BASE TO YOKE (mm)85	D HEAD DEPTH (mm)180
A HEAD WIDTH (mm).....120	E WIDTH (mm)170										
B TOTAL HEIGHT (mm).....240	F YOKE HEIGHT (mm).....165										
C HEAD HEIGHT (mm)160	G HEAD BASE TO YOKE (mm)85										
D HEAD DEPTH (mm)180	WEIGHT (kg)1,5										